


# HUBNETIX

## Aerial (ADSS) Single Jacket Outside Plant Cable

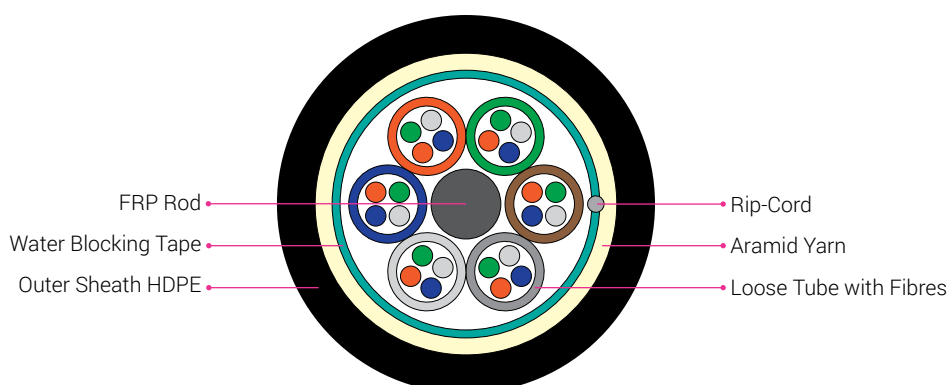

### Description

LANLINE Aerial ADSS (All Dielectric Self Supporting) Fibre Optic OSP cable series are suitably designed for installation on poles in distribution and transmission environment where live wire installation is required. These cables are designed based on required span length and the prevailing. The HUBNETIX's LANLINE Aerial cable family includes Multi-tube ADSS Single Jacket, Multi-tube ADSS Double Jacket and Uni-tube Fig-8 cables. LANLINE Aerial Cables are best suited as backbone in overhead applications. ADSS cables are suitable for use in harsh environment. These cables are designed based on the required span length and the prevailing environmental conditions. These cables offer reliable transmission over a broad temperature range. They can be installed either pole-to-pole, or lashed to existing infrastructure available for long medium & short span routes. LANLINE All Dielectric OSP cables are available in Singlemode (OS2 ITU-T G.652.D standards), Multimode-OM1, OM2, OM3 and OM4 fiber types. HUBNETIX's all LANLINE FO cables are compliance with IEC 60794, EIA/TIA, and ITU-T standards. These OSP cables are thoroughly tested and verified to Telcordia GR-20 standards and they are RoHS and CE compliant.

### Aerial ADSS Multi-Tube – Single Jacket construction

The Aerial ADSS MT single jacket Optical fibers are placed inside gel filled buffer tubes. The core is constructed by stranding the buffer tubes around a central strength member. The core is covered with a water-blocking tape. Inner PE is provided over with a layer of Aramid Yarns for necessary tensile strength and a black Outer Sheath is extruded over this core. Ripcords facilitate access to Outer Sheath for ease of entry. The Aerial ADSS MT Double jacket design offers the core is wrapped with flexible strength members covered with a water-blocking tape, then encased with a black inner sheath. Aramid yarns and a black outer jacket are applied. Ripcords facilitate access to the cable core.

### Advantages

- High Fibre Density
- Multiple Network Applications
- Dielectric design eliminates grounding issues
- Reduces cable preparation and Installation time
- Reduces number of tools required
- Reduces Fibre access and cleanup

### Features

- Fibre Count: 12F to 144F
- Singlemode, Multimode and Hybrid to outfit a variety of applications
- Dry core standard (optional)
- Anti-Tracking Resistance
- Self-Supporting
- Uni-tube designs are available from 2F to 24F

### Standard Compliance

- Telcordia GR-20, IEC 60794
- EIA/TIA, ITU-T, EN187000
- RUS1755.900, IEEE.P-1222

### Environmental Specifications (Temperature)

- Operation / Storage : -40°C to +70°C
- Installation : -30°C to +75°C

### Application

- Aerial, Direct Burial, Underground Ducts
- Trunk, Distribution and Feeder cable
- Local loop, Metro, Long-haul and Broadband Network
- ADSS Double jacket for Power Utilities

### Physical Characteristics

Fibre Count	Cable Outer Diameter (mm) Nominal	Weight (kg/km) (Nominal)	Tensile Strength (Nominal)		Crush Resistance (N/10cm)	Bending Radius (mm)	
			Installation	Operation		Temporary	Permanent
12-24	11.5	120	3000	1500	2000	115	230
26-48	11.5	130	3000	1500	2000	115	230
50-72	12.5	150	3000	1500	2000	125	250
74-96	13.5	180	4000	2000	2000	135	270
98-144	16.5	195	4000	2000	2000	135	330

## Aerial (ADSS) Single Jacket Outside Plant Cable



## Fibre Technical Specifications

## Optical Characteristics

## Multi-Mode - Fibre Type &amp; Grade

Characteristics	Conditions	Specified Values		Units
		62.5/125µm – OM1	50/125µm – OM2/OM3/OM4	
Attenuation	850nm	≤ 3.5	≤ 3.0	dB/km
	1300 nm	≤ 1.5	≤ 1.0	dB/km
Bandwidth	850 nm	≥ 200	≥ 500 / ≥ 1500 / ≥ 3500	MHz.km
	1300 nm	≥ 600	≥ 500 / ≥ 500 / ≥ 500	MHz.km
Ethernet Performance 10GBE	850nm	33	150 / 300/ 550	m
Ethernet Performance 1000GBE	850nm	220	750 / 1000/ 1100	m
Numerical Aperture		0.275 ± 0.015	0.200 ± 0.015	

## Geometrical Characteristics

Core Diameter		62.5 ± 2.5	50.0 ± 2.5	µm
Core Non – Circularity		≤ 5.0	≤ 5.0	%
Core/Cladding Concentricity Error		≤ 1.5	≤ 1.5	µm
Cladding Diameter		125.0 ± 1.0	125.0 ± 1.0	µm
Cladding Non – Circularity		≤ 1.0	≤ 1.0	%
Primary Coating Diameter		245 ± 10	245 ± 10	µm
Coating/Cladding Concentricity Error		≤ 12	≤ 12	µm
Primary Coating Material (Colored)		UV Cured Acrylate	UV Cured Acrylate	

## Mechanical Characteristics

Bending Induced Attenuation				
10 Turns @60mm Radius	850nm	≤ 0.5		dB
	1300 nm	≤ 0.5		dB
100 Turns @ 37.5mm Radius	850nm		≤ 0.50	dB
	1300 nm		≤ 0.50	dB
2 Turns @ 15mm Radius	850nm		≤ 1.0	dB
	1300 nm		≤ 1.0	dB
Proof Stress Level		≤ 1.0	≤ 1.0	%
		≤ 100	≤ 100	kpsi

## Optical Characteristics

## Single-Mode - Fibre Type &amp; Grade

Characteristics	Conditions	Specified Values			Units
		ITU-T G.652.D	ITU-T G.657.A1	ITU-T G.657.A2	
Attenuation	1310 nm	≤ 0.36	≤ 0.36	≤ 0.38	dB/km
	1550 nm	≤ 0.23	≤ 0.23	≤ 0.23	dB/km
Chromatic Dispersion	1285 - 1330 nm		≤ 3.5		ps/(nm.km)
	1550 nm		≤ 18.0		ps/(nm.km)
Cable cutoff wavelength λ <sub>cc</sub>			≤ 1260		nm
Zero Dispersion wavelength			1300 - 1324		nm
Zero Dispersion slope			≤ 0.092		ps/nm <sup>2</sup> .km
Polarization mode Dispersion (PMD)	Fibre		≤ 0.2		ps/km
	Link Design Value		≤ 0.08		ps/km

## Geometrical Characteristics

Mode Field Diameter (MFD)	1310 nm	9.2 ± 0.4	8.6 ± 0.4	6.3 ± 9.5	µm
	1550 nm	10.4 ± 0.5	9.8 ± 0.5		µm
Cladding Diameter			125.0 ± 1.0		µm
Cladding Non – Circularity			≤ 1.0		%
Core/Cladding Concentricity Error			≤ 0.5		µm
Coating/Cladding Concentricity Error			≤ 12.0		µm
Primary Coating Diameter			245 ± 10		µm
Primary Coating Material (Colored)			UV Curved Acrylate		
Fibre Curl (Radius)			≥ 4		m

Note- The optical attenuation/PMD given values may change due to fibre cabling.

## Mechanical Characteristics - SM

## Single-Mode - Fibre Type &amp; Grade

	Conditions	Specified Values			Units
		ITU-T G.652.D	ITU-T G.657.A1	ITU-T G.657.A2	
Bending Induced Attenuation					
1 Turn @32mm Diameter	1550 nm		≤ 0.05		dB
100 Turns @ 50mm Diameter	1310 nm		≤ 0.05		dB
	1550 nm		≤ 0.05		dB
100 Turns @ 60mm Diameter	1625 nm		≤ 0.05		dB
Proof Stress Level			≥ 1.00		%
			≥ 100		kpsi

## Environmental Characteristics

Environmental Tests				
Temperature Dependence	-60 to +85°C		≤ 0.05	dB/km
Temperature-Humidity Cycling	-10 to +85°C		≤ 0.05	dB/km
Water Immersion	23		≤ 0.05	dB/km
Dry Heat Aging	85		≤ 0.05	dB/km
Damp Heat	85°C @ 85% RH		≤ 0.05	dB/km

## Aerial (ADSS) Single Jacket Outside Plant Cable



## Fibre Color Code

1	RD – Red	7	BR – Brown	13	RD – Ring mark every 50mm	19	BR – Ring mark every 50mm
2	GR – Green	8	VT – Violet	14	GR – Ring mark every 50mm	20	VT – Ring mark every 50mm
3	BL – Blue	9	TQ – Turquoise	15	BL – Ring mark every 50mm	21	TQ – Ring mark every 50mm
4	YL – Yellow	10	BK – Black	16	YL – Ring mark every 50mm	22	BK – Ring mark every 50mm
5	WT – White	11	OR – Orange	17	WT – Ring mark every 50mm	23	OR – Ring mark every 50mm
6	GY – Grey	12	PK – Pink	18	GY – Ring mark every 50mm	24	PK – Ring mark every 50mm

## Ordering Info &amp; Part Numbers

Part Number Example	Description
HLH-FAA1M3N24-XX	LANLINE 24-Fibre, OM3 MM, Aerial ADSS, Multi-tube Single jacket, Outside Plant Cable

HUBNETIX Prefix			1	2	3	4	5	6
H	L	H	F	AA1	M3	N	24	XX

1=F - Fibre Optic	2=Cable construction	3=Fibre type	4=Flame Rating	5=XX - Fibre Count	6=XX - Fibre Color code
	<b>AA1</b> – Outside plant (OSP), Aerial ADSS Multi-tube Single jacket	<b>S1 – Singlemode</b> OS1 9/125µm	<b>L</b> – Low Smoke Zero Halogen <b>H</b> – HDPE	<b>12</b> – 12-fibre <b>24</b> – 24-fibre	<b>BK</b> – BLACK
	<b>AA2</b> – Outside plant (OSP), Aerial ADSS Multi-tube Double jacket	<b>S2 – Singlemode</b> OS2 9/125µm (ITU G.652.D)	<b>N</b> – Non-Rated	<b>36</b> – 36-fibre <b>48</b> – 48-fibre	
	<b>FM</b> – Outside plant (OSP), Aerial Multi-tube Figure 8	<b>M1 – Multimode</b> OM1 62.5/125µm		<b>72</b> – 72-fibre <b>96</b> – 96-fibre	
	<b>FU</b> – Outside plant (OSP), Aerial Uni-tube Figure 8	<b>M2 – Multimode</b> OM2 50/125µm		<b>120</b> – 120-fibre <b>144</b> – 144-fibre	
		<b>M3 – Multimode</b> OM3 50/125µm			
		<b>M4 – Multimode</b> OM4 50/125µm			

**Note:** All packaging is 2,000 mtr drum reel. The above shown cable designs are HUBNETIX standard designs. Other lengths and customised designs are available upon specific request.

**HUBNETIX CORPORATION**  
71-75, Shelton Street, London, UK.  
[www.hubnetix.com](http://www.hubnetix.com)

The dimensions and specifications in this document are for reference purposes only and are subject to change without notice. Consult HUBNETIX Corp. for the latest dimensions and design specifications.

