

HUBNETIX Category 5e

UTP Modular Plug



Mechanical Properties

- Cable-to-plug tensile strength 20LBS(89N) min
- Durability: 2000 mating cycles


Electrical Characteristics

- 250V AC max, at 2A
- Dielectric withstanding 1000V DC/min, <0.5A
- Insulation Resistance: >500 MΩ, 1000V DC/min
- Contact Resistance : <20 MΩ
- Compliant with the limits of RoHS and REACH
- Temperature Range : -40°C to +125°C

Application

- Long lasting high-performance and full support of all present and emerging applications, including 1000BASE-T(Gigabit-Ethernet)
- suitable for round cables with stranded or solid conductors
- These are mainly used for patch cord termination

Structure

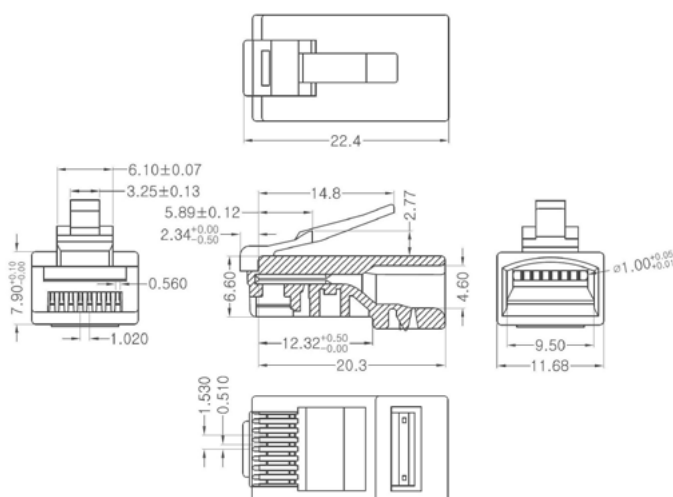

Ordering Info

Part Number	Description
HLY-MP5E	HUBNETIX Category 5e UTP Modular Plug

HUBNETIX CORPORATION

71-75, Shelton Street, London, UK.
www.hubnetix.com

The dimensions and specifications in this document are for reference purposes only and are subject to change without notice. Consult HUBNETIX Corp. for the latest dimensions and design specifications.

